

ECP48CX-5**Five-section RZ-FOLD****BOOM SPECIFICATION**

Folding type	5-section RZ-folding
Max. vertical reach	154'6" (47.1m)
Max. horizontal reach	138'1" (42.1m)
Max. depth reach	108'7" (33.1m) (incl. End hose 3m)
Unfolding height	39'4" (12m)
Slewing angle	360deg.
End hose length	10' (3m)
Delivery pipe dia.	5" (125mm)

PUMP SPECIFICATION

Pump cell	2116
Control system	Closed Free Flow Hydraulic
Main pump	A4VG125x2
Concrete cylinder	9"x83" (230x2,100mm)
Strokes No.(per min.)	30
Concrete output*	210yd ³ /hr (160m ³ /h)
Concrete pressure*	1,233psi (85bar)
Transfer tube type	S-Tube, S2318 (Dia. 230-180mm)
Volume of hopper	158gal (600L)

*Rod side. Ouput & pressure are theoretical data.

FEATURE

Inductive proximity switch with indicator	Flushing water pump(30bar)	Twin wall pipe
Single lip concrete piston	Auto lubrication system for hopper	Working light on boom
Hard-chromed concrete cylinders	Tungsten carbide for wear ring and plate	Safety(OSS) system
Greasing port on boom link and pedestal	Flap elbow(180-150mm) with cleaning port	Safety device for hopper
Working light on pedestal	Agitator motors on both side hopper	Auxiliary fuel tank on one side rear outrigger
Aluminum platform(non-skid)	Working light on hopper	

EVERDIGM HEAD OFFICE

49, Buyeong-gil, Jincheon-eup, Jincheon-gun, Chungcheongbuk-do, Korea
Tel +82-43-530-3300 **Fax** +82-43-530-3429

EVERDIGM AMERICA

655 West Lytell Street, Metter, Georgia 30439, USA
 E-mail: everdigmamerica@everdigm.com
Tel +1-912-685-5099

CPE AMERICA

655 West Lytell Street, Metter, GA 30439, USA
 www.cpeamerica.com
 sebastian@cpeamerica.com
 tony@cpeamerica.com
Tel +1-912-685-5200


**Authorized distributor of
 EVERDIGM Concrete Pumps**



ECP48CX-5


Five-section RZ-FOLD

TOTAL WEIGHT= 77,080 lbs (34,963kg)

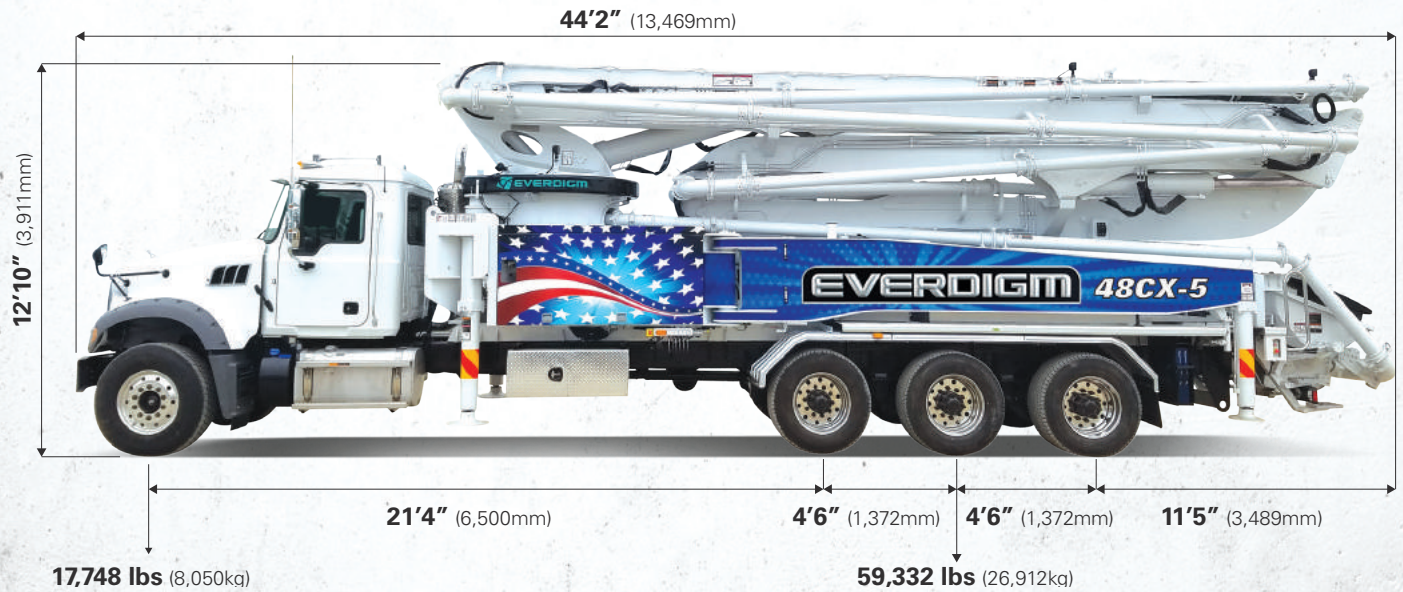


Based on Model MACK GU714 with 2116 pump cell. Dimensions will vary with different truck makes, models and specifications. Weights are approximate and include pump, boom, truck, driver and some fuel. Varies with options selected.

WORKING RANGE

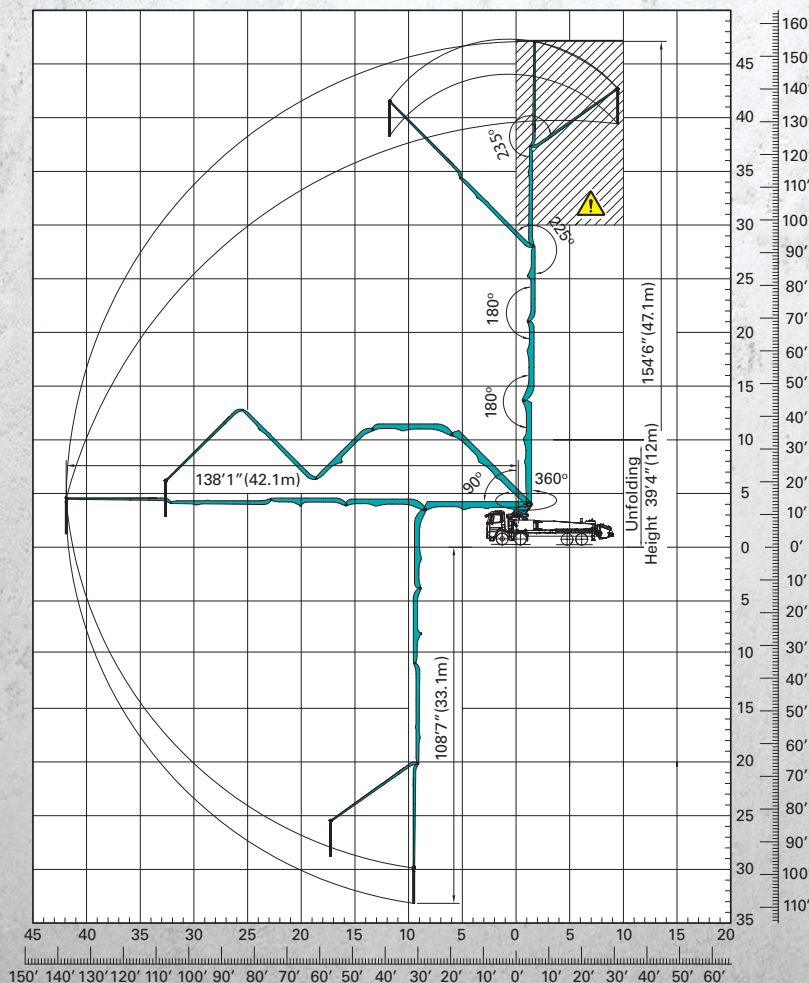

⚠ Don't use in caution area

OUTRIGGER SPREAD

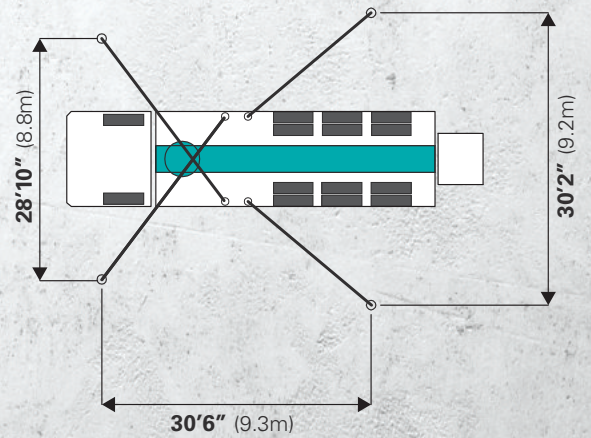

Front outrigger type X(Diagonal) Extension
Rear outrigger type Swing-out

