


ZOOMLION

**VISION
CREATES FUTURE**

36X-5Z

Truck-Mounted Concrete Pump

ZOOMLION

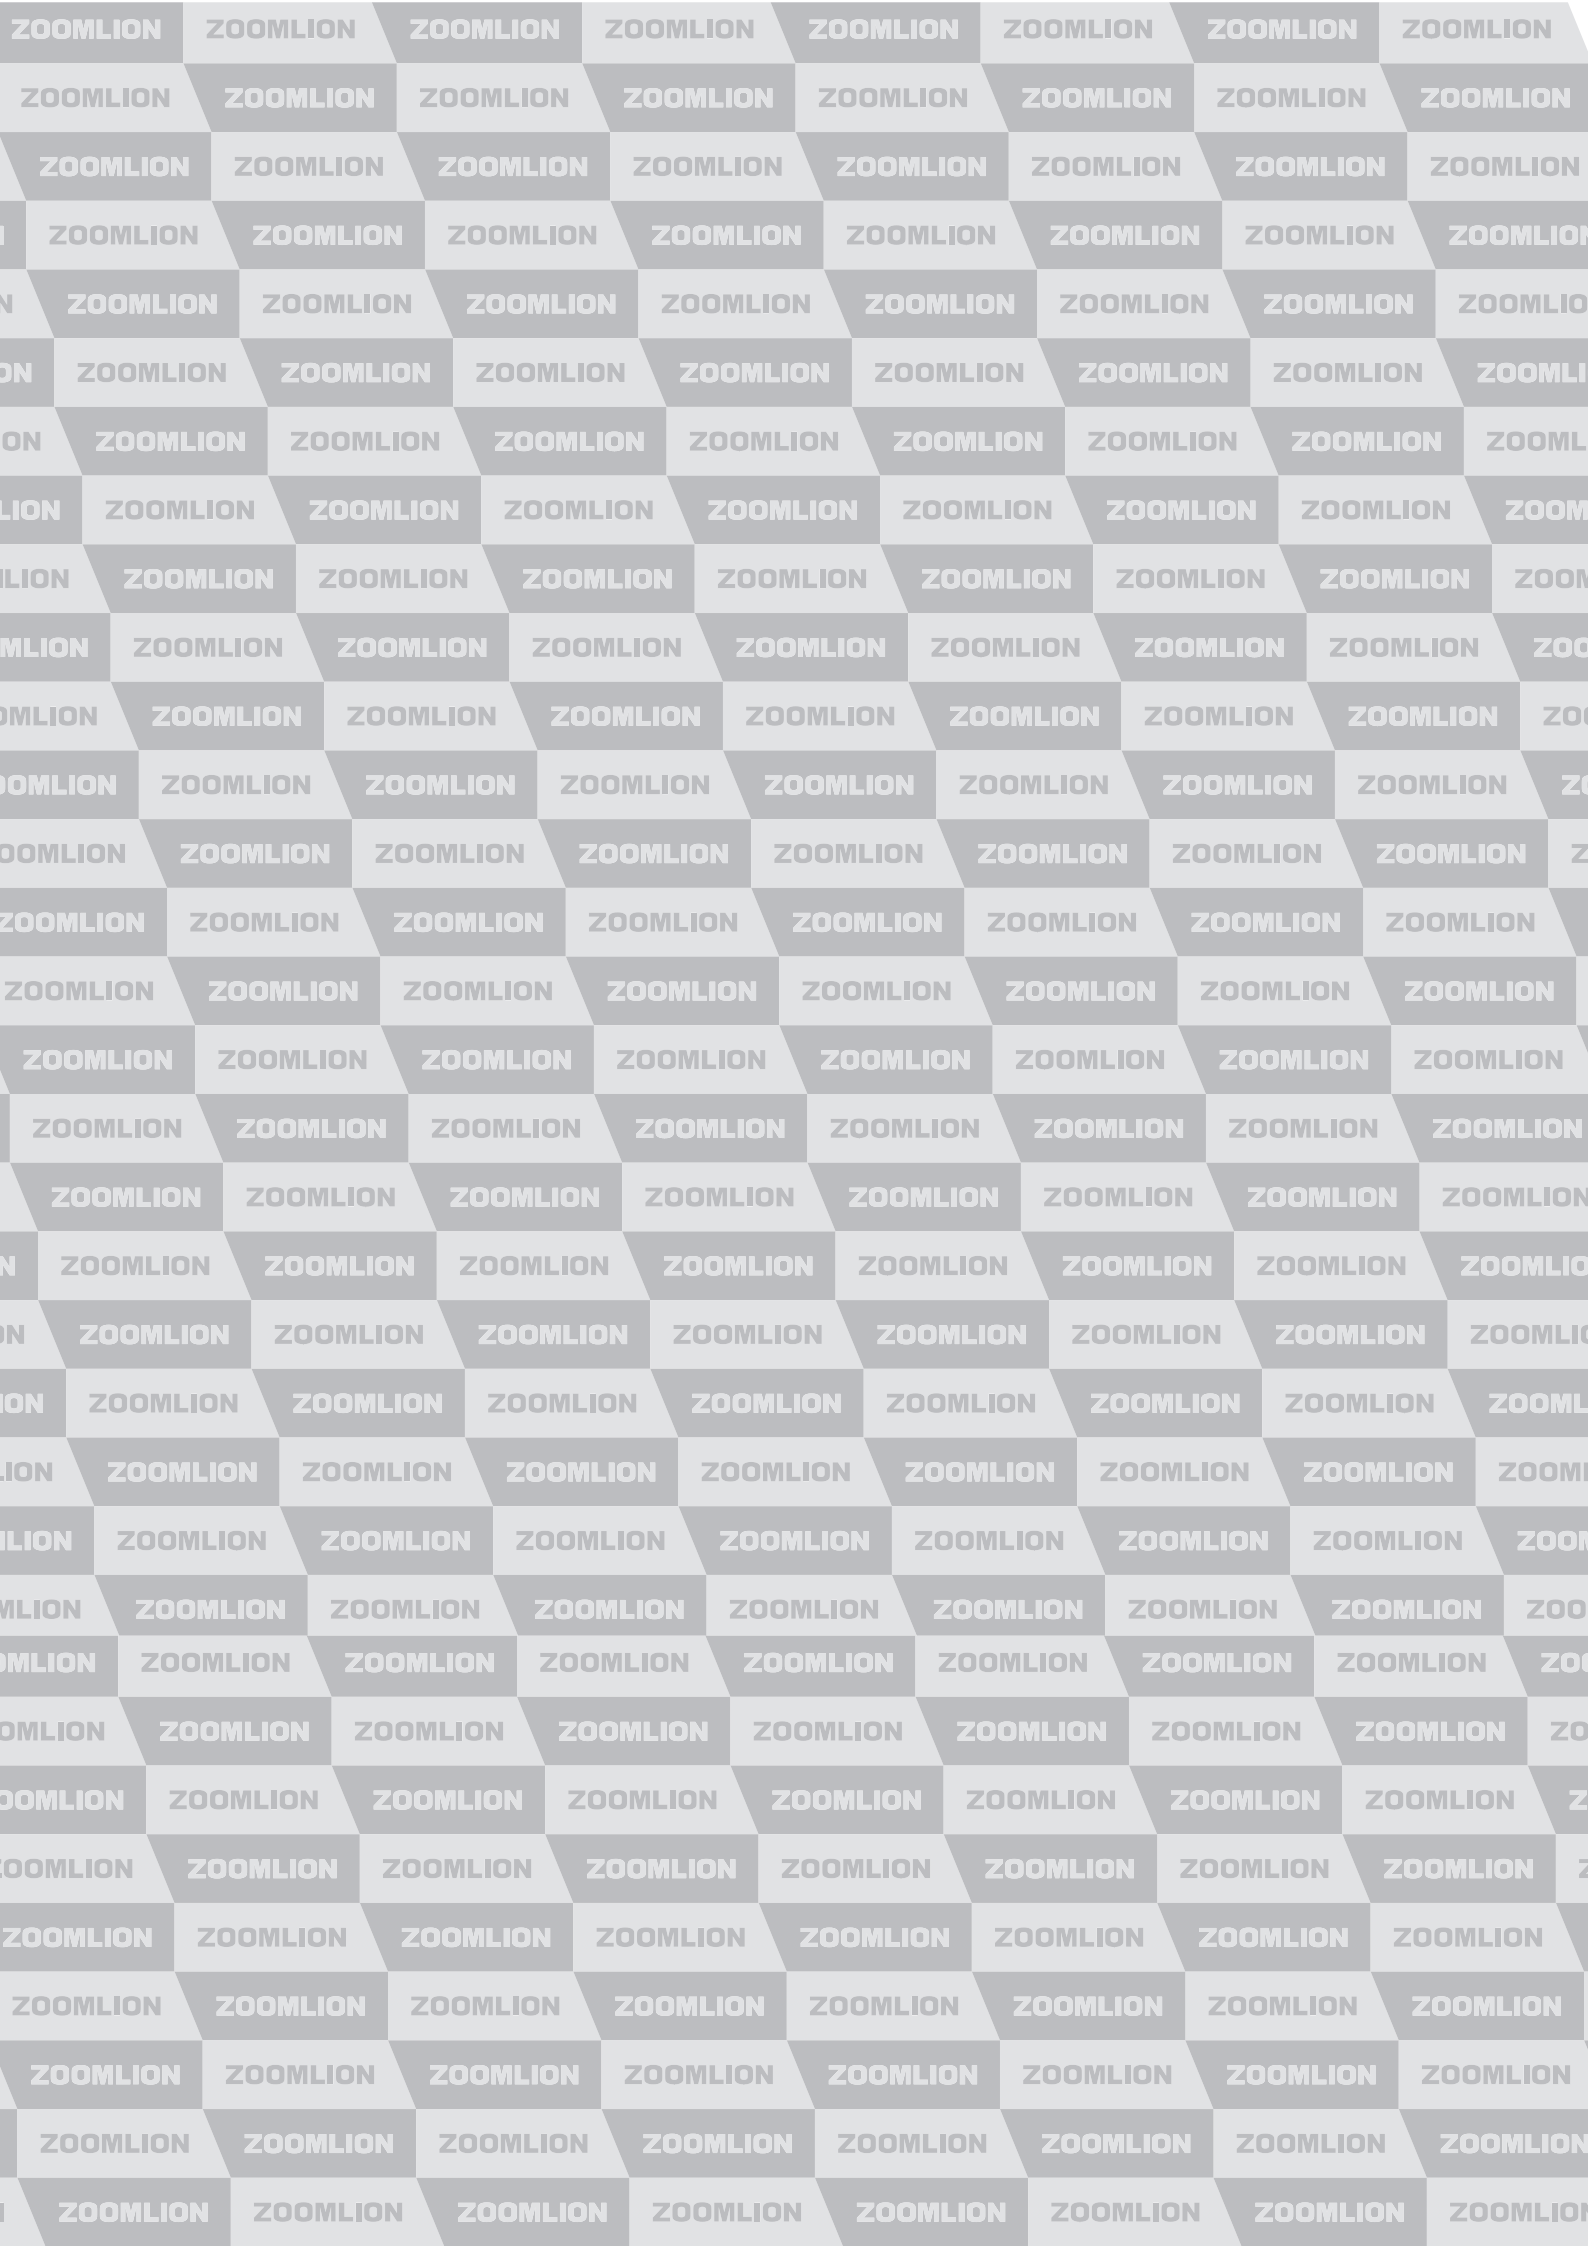



36X-5Z

TRUCK-MOUNTED CONCRETE PUMP


Placing boom	K36-5Z
Pumping unit	PU1607
Driven by	PTO Gearbox
Chassis	Cabover/Conventional

ZOOMLION | Industry Innovation




Stability

Boom intelligent damping technology: The soft control of booms in starting, slewing and stopping reduces the impacting vibration of booms, which gives the boom more stable operation.

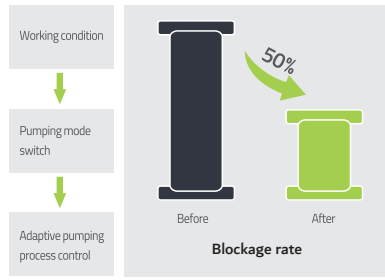


Pumping Performance

Adaptive Concrete Material Pumping Technology: Improved pumping control system for poor concrete with segregation and big viscosity, and auto-adaptive pumping mode, which reduces the blockage rate by more than 50%.

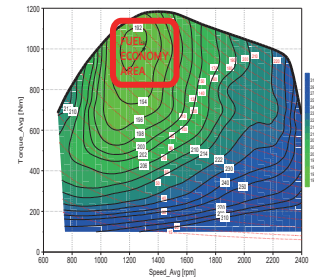

Fuel Economy

Adaptive Power Distribution Control Technology (APD): Automatically changing power mode according to pumping situation, the engine always work at economic oil consumption area that saves oil by 15% compared to other brands.

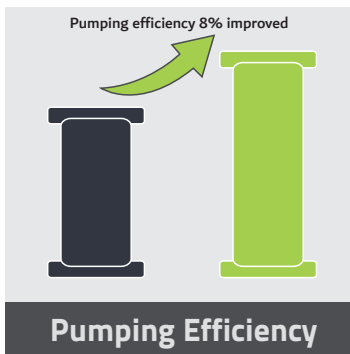


Pumping Efficiency

Accurate Pumping Control Technology (APC): An industry first, pumping control mode can be changed to match your working situation. Displacement sensor is used to detect and control the movement of pistons. The accuracy of each stroke can be controlled within 99.46%. This advantage cause the pump is more controllable, and pumping efficiency reached an unprecedented level.



Quality

ZOOMLION's experimental platform is a world leading platform, guarantees the high quality of ZOOMLION products. The boom structure has been tested no cracks for pumping 450,000 cubic meters concrete or after 8 years using. ZOOMLION's high quality products gives you confidence and safety at work.

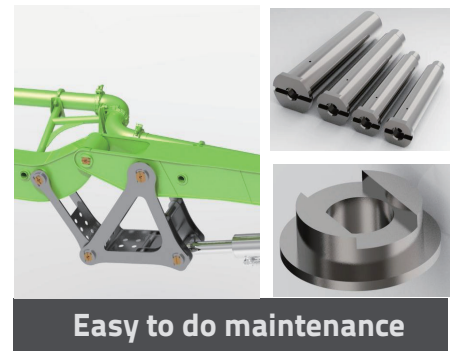

Easy to do maintenance

Long life, cost-effective parts are designed to maximize its convenience for tear down and maintenance. Anti-wearing material is used at the wearing position of elbows. Double-layer pipes are used to hold the strong puming performance. These robust parts keep you running in a low-cost and convenient way.






36X-5Z

TRUCK-MOUNTED CONCRETE PUMP



Placing boom	K36-5Z
Pumping unit	PU1607
Driven by	PTO Gearbox
Chassis	Cabover/Conventional



Dimensions, Reach Information Diagram, Support

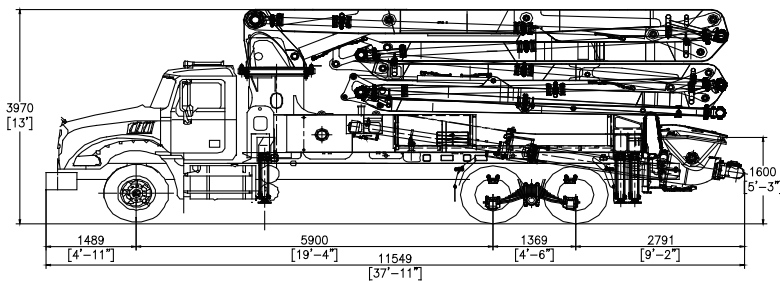

Dimensions varying according to truck assembly

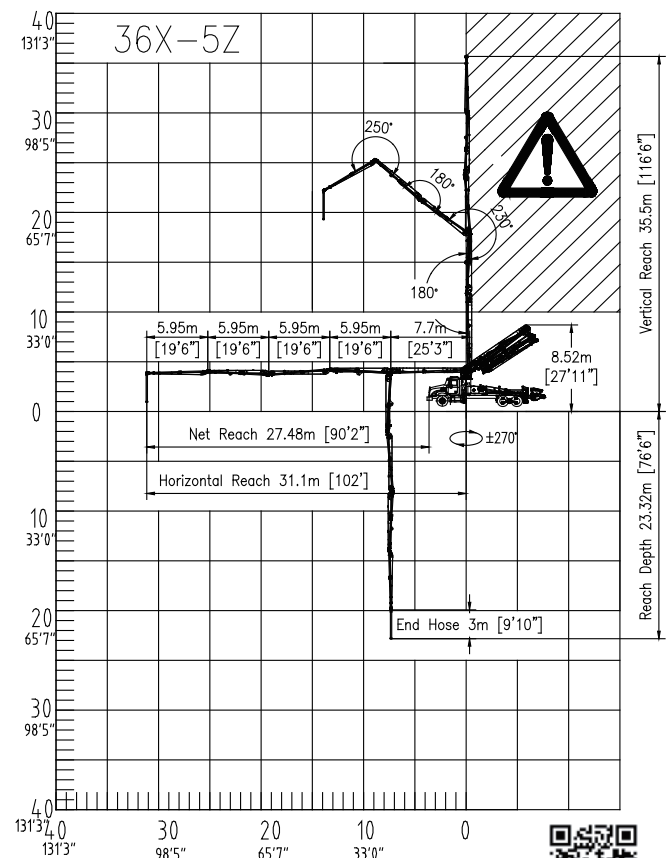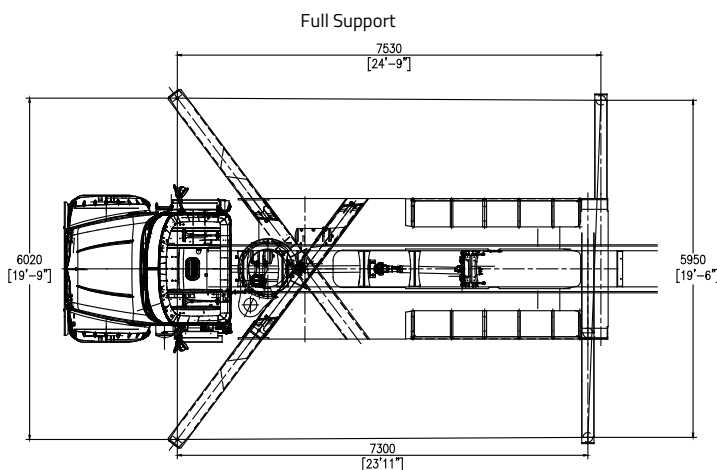

Zoomlion Heavy Industry Science & Technology Co.,Ltd.

Add: No.677, Lugu Road, Zoomlion Industrial Park, Changsha, Hunan, China, 410205

Copyright©2022 Zoomlion. All rights reserved. Reproduction and copying of any part of contents is not allowed for any purposes without Zoomlion's approval.

en.zoomlion.com





36X-5Z

TRUCK-MOUNTED CONCRETE PUMP

Placing boom	K36-5Z
Pumping unit	PU1607
Driven by	PTO Gearbox
Chassis	Cabover/Conventional

Standard Equipment

- Compact design, 36m pump mounted on 3-axle truck .
- Efficient pumping unit, ideal for long time use.
- Agile placing boom with 4 arms, and unfolding height only 8.52m (27'11"), which gives a wide work range.
- Proportional radio controls with two speeds boom movement, automatic frequency scanner.
- Double-layer concrete pipes ensure the working reliability.
- Centralized lubrication system for pumping unit.
- Durable wear plate and cutting ring for pumping unit.
- OSS (One-side support).
- Alluminum hopper covering.
- Double water pumps (High and low pressure).
- Use & Maintenance Manuals.
- Spare parts and service manual.

Optional

- Chassis brand: Mack, Freightliner, AutoCar, and etc.
- Other configuration on demand.



Z Type

Quick unfolding operation and flexibility for any job site.

Available for: **ZL32 - ZL36**



Front: Single telescopic X style

Rear: Single horizontal

Available for: **ZL32 - ZL36**



OSS Available

Placing Boom Technical Data

Model			36X-5Z
Pipeline diameter		5"	125 mm
Maximum vertical reach		116'6"	35.5 m
Maximum horizontal distance (from center of slewing axis)		102'0"	31.1 m
Minimum unfolding height		27'11"	8.52 m
Section numbers			5
1st section	Length	25'3"	7700 mm
	Opening angle		90°
2nd section	Length	19'6"	5950 mm
	Opening angle		180°
3rd section	Length	19'6"	5950 mm
	Opening angle		230°
4th section	Length	19'6"	5950 mm
	Opening angle		180°
5th section	Length	19'6"	5950 mm
	Opening angle		250°
Rotating angle			±270°
End hose length		9'10"	3 m

Pumping Unit Technical Data

Model		PU1607
Maximum theoretical output	209/131 yd³/h	160/100 m³/h
Maximum pressure on concrete	1015/1595 psi	70/110 bar
Concrete cylinders (diam. x stroke)	9"x6'11"	230x2100mm
Concrete hopper capacity	145 gal	550L
Hydraulic circuit		Open



ZOOMLION

Zoomlion Heavy Industry Science & Technology Co.,Ltd.

Add: No.677, Lugu Road, Zoomlion Industrial Park, Changsha, Hunan, China, 410205

Copyright©2022 Zoomlion. All rights reserved. Reproduction and copying of any part of contents is not allowed for any purposes without Zoomlion's approval.

